ROHDE & SCHWARZ Make ideas real

R&S®FPC SPECTRUM ANALYZER Unexpected performance in entry class



Outstanding performance and innovation

The R&S[®]FPC spectrum analyzer provides unexpected performance at a budget-friendly price. It is engineered in Germany and designed to the same quality standards as highend instruments.

Investment protection

The R&S[®]FPC base instrument has a frequency range of 5 kHz to 1 GHz. Keycode options unlock higher frequency ranges up to 3 GHz or enable other features when required

The perfect choice for

Class-leading RF performance

High resolution

spectral details

Virtual control

the best dynamic range in its class

R&D & service labs	Test automation
Professionals Hobbyists	Education & training

Engineered in Germany, the R&S®FPC has an extraordinarily low

noise floor and high max. input power, in combination providing

measurement bandwidth settings down to 1 Hz resolve the finest

The R&S®FPC supports wired Ethernet and Wi-Fi connectivity.

R&S[®]InstrumentView for Microsoft[®] Windows as well as the iOS/Android App based R&S[®]MobileView platforms enable


remote control and measurement anywhere, anytime

High display resolution with 10.1" WXGA display and

Kev specifications Models R&S[®]FPC1000 **B&S®FPC1500** Frequency range 5 kHz to 1 GHz with upgrades up to 3 GHz Max. input power up to +30 dBmdown to -165 dBm (typ., with preamplifier) Low noise floor <-103 dBc/Hz (f=500 MHz, @100 kHz offset) Phase noise Connectivity LAN, USB, Wi-Fi (optional) Measurement modulation analysis, receiver mode, options advanced measurements Independent signal No Yes generator Tracking generator No Yes

Your benefit	Features
Investment protection	All upgrades available via keycode, no additional calibration required
More resolution for better measurements	 Lowest noise floor in class down to -165 dBm (typ., with preamplifier) resolution bandwidth down to 1 Hz 10.1" WXGA display
Flexible remote measurements	First Wi-Fi-enabled spectrum analyzer (R&S®FPC-B200 option) for wirelessly accessing the instrument

×

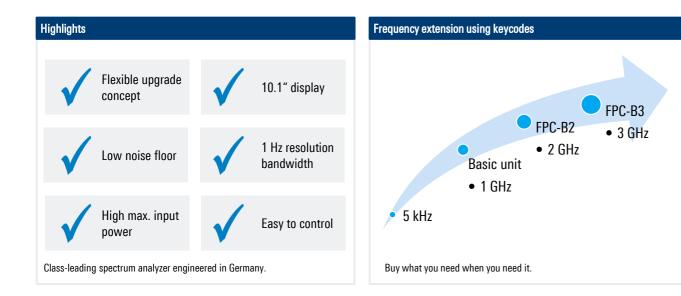

Easy virtual control ¹⁾ – control it your way, be it wired or wirelessly

Wireless remote control with R&S®MobileView apps (available on Android and iOS)





Wired/wireless remote control with R&S®InstrumentView PC software

	Flexible remote control on demand, anywhere, anytime.
--	---

¹⁾ Wi-Fi feature not available in some countries due to local certification requirements.

 Rohde & Schwarz GmbH & Co. KG | Europe, Africa, Middle East +49 89 4129 12345 | North America 1 888 TEST RSA (1 888 837 87 72)

 Latin America +1 410 910 79 88 | Asia Pacific +65 65 13 04 88 | China +86 800 810 82 28 / +86 400 650 58 96

 www.rohde-schwarz.com | customersupport@rohde-schwarz.com

 R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG | PD 3608.5106.32 | Version 01.00 | April 2020 (as)

 Trade names are trademarks of the owners | R&S®FPC spectrum analyzer | Data without tolerance limits is not binding

Subject to change | © 2020 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany

Ordering information	
Base unit	
R&S®FPC1000 spectrum analyzer, 5 kHz to 1 GHz	R&S®FPC1000
R&S®FPC1500 spectrum analyzer, 5 kHz to 1 GHz	R&S®FPC1500
Option	Base Unit
Spectrum analyzer frequency upgrade, 1 GHz to 2 GHz	R&S®FPC-B2
Spectrum analyzer frequency upgrade, 2 GHz to 3 GHz	R&S®FPC-B3
Spectrum analyzer preamplifier	R&S [®] FPC-B22
Wi-Fi connection support	R&S [®] FPC-B200
Modulation analysis	R&S [®] FPC-K7
Receiver mode	R&S [®] FPC-K43
Advanced measurements	R&S [®] FPC-K55
Accessories	
19" rackmount kit	R&S [®] ZZA-FPC1
Near field probes, 30 MHz to 3 GHz	R&S®HZ-15
Amplifier, 100 kHz to 3 GHz	R&S®HZ-16
Carrying case	R&S®RTB-Z3